


Tips for a Successful Healthcare Project

HEALTH CARE CONSTRUCTION SUMMIT

Tuesday, May 27, 2008


Gypsum Board / Framing

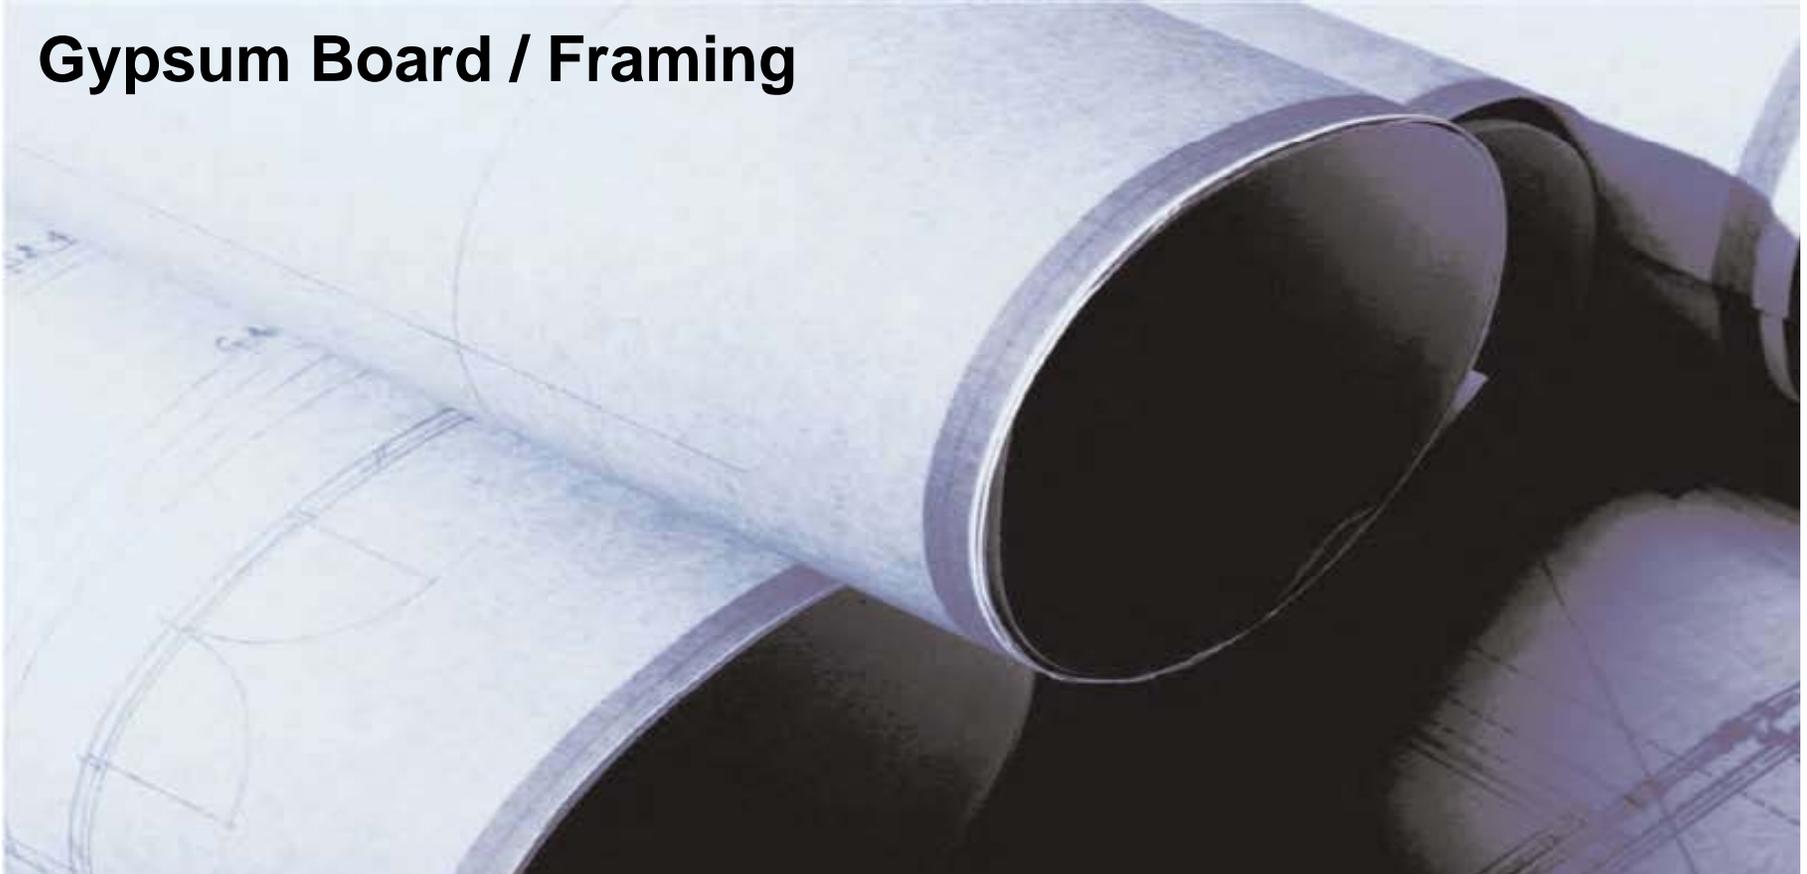



Topics for Discussion

- Why is health care construction different?
 - *Health care construction in California vs. other states*
- What is unique to your trade on a hospital project?
- Health care construction: The Ideal State vs. Reality
 - *What is suppose to happen*
 - *What does happen*
 - *Common slip-ups to avoid*
- Resources available to help contractors succeed?
- How to get involved in health care construction jobs

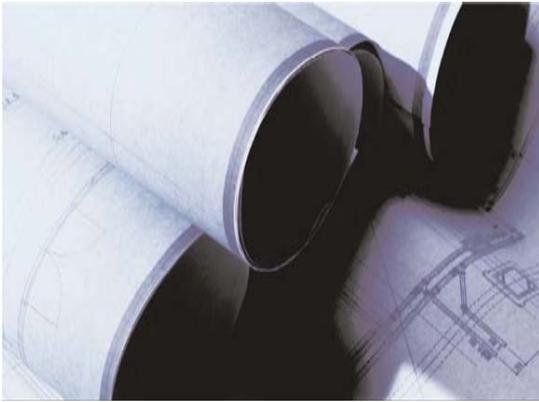

Health Care Construction is Different

“It’s a matter of life or death”

- Patient and staff safety depend on the proper operation of the systems in hospitals
- Life Support
 - *Emergency Power Systems*
 - *Medical Gas Systems*
- Infection Control
 - *Ventilation Systems*
 - *Plumbing Systems*
 - *Architectural Finishes*
- Earthquakes



Health Care Construction is Unique

Higher Standards for Performance

- Commercial buildings may not be repairable or functional following a “Design Event” (fire, earthquake, etc.)
- Hospitals must function following an incident
- Fire philosophy is to “defend in place”
 - *Patients may be too ill to evacuate*
 - *Patients are moved to adjacent “compartments”*
- Earthquake philosophy: Hospitals must be reasonably capable of providing services to the public
 - *Limited damage*
 - *Critical equipment and systems remain operational*



Health Care Construction

What is Suppose to Happen

- The Hospital Design Team (Architects, Engineers, etc.)
 - *Identify existing conditions*
 - *Design a code compliant project*
- OSHPD Reviewers
 - *Identify every code deficiency and see they are corrected*
- Contractors
 - *Build according to the approved drawings*
- IORs and OSHPD Field Staff
 - *Inspect for conformance with the approved drawings*



Health Care Construction

What Does Happen


- The Hospital Design Team
 - *Designs a code compliant project based on the information they have and constraints of time and budget*
- OSHPD Reviewers
 - *Identify major code deficiencies, major coordination issues*
- Contractors
 - *Builds according to the approved drawings, accounting for variations in the existing conditions and uncertainty in the code and drawings, corrects “unbuildable” conditions*
- IORs and OSHPD Field Staff
 - *Inspect for conformance with the approved drawings and the code – identifying major and minor code deficiencies*
 - *Attempts to be flexible when code is “unclear” or where the design is “unbuildable”*



Health Care Construction

Keys to a Successful Project

- Familiarity with the building code
- Coordination with other trades
- Craftsmanship!
- Foresight-
 - *Identify potential problems*
 - *Clarify before you build*
- Team effort – not a battle of wills

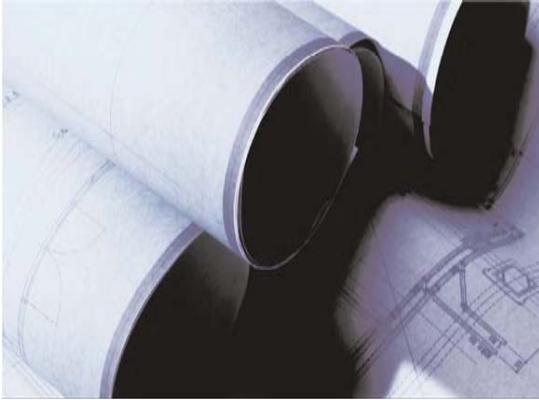

Health Care Construction

When Problems Arise...

- Types of problems you may encounter
 - *Unforeseen Conditions*
 - *Work that does not match the approved drawings*
 - *Code deficiencies that were not caught in plan review*
 - *Code interpretation issues*
- When problems occur resources are available
- On-site resources
 - *IOR's*
 - *OSHPD Field Staff*



Health Care Construction

Additional Resources

- How to get involved in health care construction jobs
 - *Contact your Trade Association*

- Industry resources
 - *Training & Certification Classes*

- OSHPD
 - *www.oshpd.ca.gov/fdd/*



Health Care Construction

Carpenter-Drywall/Lathers

Local Union 68L

8400 Enterprise Way # 202

Oakland CA 94621 -- (510) 430-1412

Serving Counties of: Alameda, Amador, Calaveras, Contra Costa,
Mariposa, Merced, San Francisco, San Joaquin, Stanislaus,
Tuolumne



Health Care Construction

- Industry resources Contact Information

<http://www.drywall-lathing.com/>

<http://www.unionbuilt.net/>

<http://www.drywallca.com/index.html>

<http://www.ctcnc.org/>



- [Home](#)
- [Building/Safety](#)
- [Financing](#)
- [Healthcare Workforce](#)
- [Data and Reports](#)
- [Public Meetings](#)
- [Press Room](#)

[Project Status](#) | [Seismic Retrofit Program](#) | [Facility Loan Insurance](#)

[Home](#) → [FDD](#) → [Plan Review](#)

- FDD LINKS**
- [FDD Home](#)
 - [Project Tracking](#)
 - [Codes & Regulations](#)
 - [CANS & PINS](#)
 - [Hospital Inspector Certification Program](#)
 - [Applications, Forms & Instructions](#)
 - [Staff Contacts](#)
 - [Calendar of Events](#)
 - [Ombudsman Information](#)
 - [Employment Opportunities](#)
 - [Business Opportunities](#)
 - [Site Map](#)
 - [FDD About Us](#)
 - [Links](#)

Facilities Development Division (FDD) - Plan Review & Construction Observation

Plan Review and Construction Compliance Goal:

Plan Review and Construction Compliance will (a) provide quality service to our clients by being efficient, flexible, responsive and accountable, and (b) will review plans, specifications, and observe health care facilities construction to ensure compliance with applicable codes and regulations.

PLAN REVIEW & CONSTRUCTION OBSERVATION

- | | |
|--|--|
| → Plan Review Process | → Construction Observation Process |
| → 60/30/30 Program | → Testing Inspection Observation (TIO) |
| → Over the Counter (OTC) | → Hospital Inspector Certification Program |
| → Standard Comments | → Field Reviews - FREER |
| → Alternate Method of Compliance | → SB 1838 Exemption from Plan Review for Projects of \$50,000.00 or less |
| → Comment and Process Review (CPR) | → AB 2632 Project Review |
| → Required Weight & Size | → SB 224 Project Review |
| → Plan Approval with Comments | → Licensed Clinics |



General Tips

- Ensure you have a building permit before you start
- Have a copy of the OSHPD approved plans and specifications (contract documents) onsite
- Conduct a pre-job conference with the foreman, Inspector of Record (IOR) and OSHPD prior to installation



General Tips

- Plan to execute the work shown on the approved contract documents
- Don't perform work that is not shown on the approved contract documents which alters the intent, scope or function of the project until approved by OSHPD
- Avoid redesign and material substitutions after construction starts



General Tips

- Timely submittals of changes, redesign, alternate means or methods and material substitutions
- Install materials in accordance with the contract documents, manufactures installation instructions and/or approved listings
- Make sure your installation instructions and material submittals are available to the inspectors



The Devil is in the Details

- Fully understand Head of Wall Details and all UL Listed systems affecting your work
- Review details for intersections of walls with different ratings
- Make sure you have approved details for any unusual installations, i.e. 5-sided boxes, walls extending beyond the slab edge, beam and column interface to name a few



Before you Start –

- Consider Mock-ups
- Proper handling and storage of materials at the site
- Have a plan for weather protection and climate control ahead of time
- Sequence your work to avoid reworking
- Z-clips /spray applied fire proofing
- Framing for ducts and piping



Framing Installation Methods

- Framing the doors, square, plumb, and level
- Adequate framing material for edge fastening on ceilings
- Cutting metal studs to maintain distance past knockouts
- Proper location of screws on slip systems



Gyp Board Installation Methods

- No beveling edges in rated frames
- Watch your edge distance on the fasteners
- Set screw guns for proper depth of fasteners
- Moderate contact on joints
- Observe limits on gaps at electrical boxes and depth of electrical boxes



Health Care Construction

Q & A