




Calibration Box for Sand in Plaster Mixes

- A calibration box is used to establish how many No. 2 shovels are required to equal one cubic foot.
- Calibration should occur at the beginning of each day or after each new delivery of sand.
- Once the shovel count is established, the sand may be added to the mixer with a No. 2 shovel.
- Bagged sand can be added directly to mixer.

This technical document is to serve as a guideline and is not intended for any specific construction project. The TSIB makes no warranty or guarantee, expressed or implied.

Shovel and Calibration Box

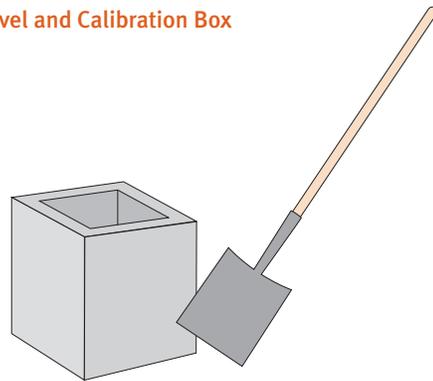

Adding sand with a shovel is acceptable once the shovel count is calibrated

